Round Courtesy Light

Part#: 69320

PARTS NEEDED:

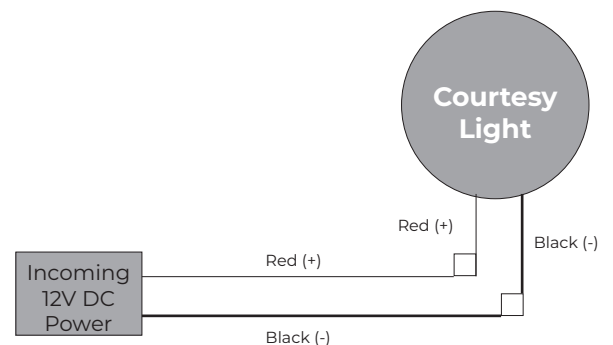| Courtesy Light	Mounting Screws	Power Drill & 1" Spade Bit (not provided)	Wire Nuts (not provided)

Safety Instructions

· Disconnect power before installing, adding or changing any component.
· To avoid a hazard to children, account for all parts and destroy all packing materials.
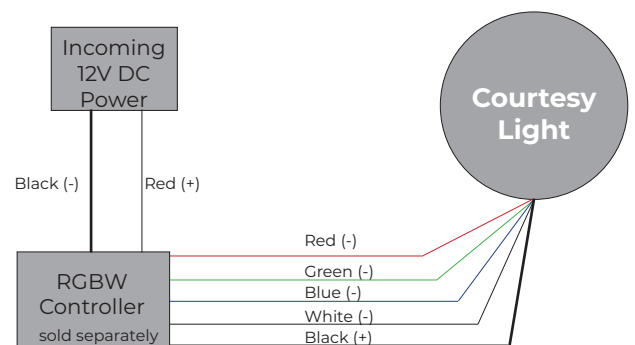· Operating Voltage: 10 - 14V DC

1. Determine installation location and cut a hole with 1" hole saw or spade drill bit

2. Twist bezel counter-clockwise to remove

3. Attach wires to power source

4. Push light into hole and attach with provided screws.

5. Replace bezel by pushing on and twisting clockwise until secure.

Mounting Surface

Power Source
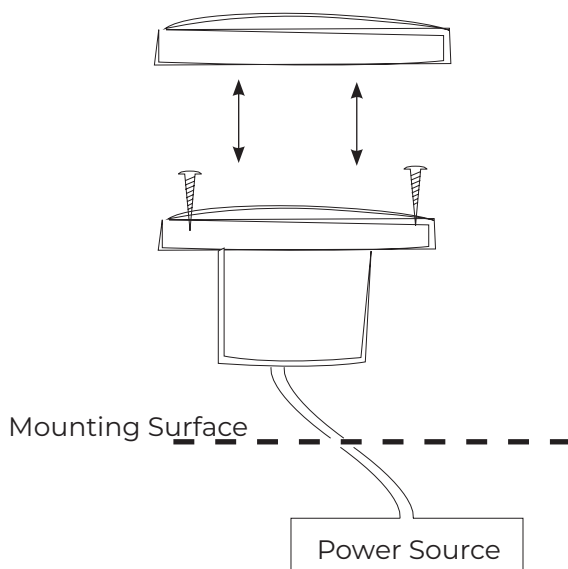
6. Use the wiring diagrams below to wire the light to the units power. Test the light

Courtesy Light

Red (+)

Black (-)

Red (+)

Incoming 12V DC Power

Black (-)

Single Color Wiring

Incoming 12V DC Power

Courtesy Light

Black (-)   Red (+)

Red (-)
Green (-)
Blue (-)
White (-)
Black (+)

RGBW Controller
sold separately

RGBW Wiring

Note: The RGB light will not have a white wire