

Frontier™ Classic

Integrated LED Illuminated Mirror





Features

- Improved illumination and reduced shadowing through the use of forward facing lighting
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Lead free silver backing exceeds ISO 9227:2012, 120 hour corrosion testing
- Back box power supply provides flexible installation that meets stringent building codes
- Optional heating pad provides fog-free illumination
- Customizable options include dimming and color selection

Product Details

Part #	69455.3927.KK.RMT	690010.121 - 0-10V Dimming 690010.143 - Line Voltage 690010.143-2 - Line Voltage w/ Plug
Dimensions	39.4"H x 27.6"W x 1.8"D	13"L x 1.25"W x 1.7"D
Mounting Frame/ Housing	Aluminum	Aluminum
Wattage	26W	Output: 96W Max
Voltage	24V DC	Input: 120 - 277V AC
Current	0.3A	Output: Max 4A
Lumens	2500LM	N/A
Color Temp.	3000K	N/A
Power Factor	N/A	0.94 @ 120V AC
Frequency	N/A	50 - 60Hz



Line Voltage Approved Dimmers

Leviton		Lutron	
VPI06-1LZ	DZ6HD	SCL-153PR	CTCL-153PDH
TTI06-1LZ	6674	DVCL-153PR	PD-6WCL
IPL06	6672	DVWCL-153PH	PD-5NE-WH




3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com



REV: 011525

Specification Guide

Sample Part #: 69455.3927.30.RMT-AB

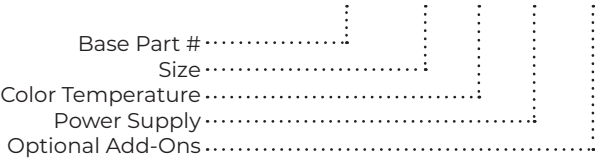

Base Part #	Size	Color Temp.	Power Supply	Optional Add-Ons
Standard Stock Mirrors				
69455	3927 - 39"W x 27"H	30 - 3000K	RMT - Remote Power Supply	N/A
Custom Mirrors				
69455	3927 - 39"W x 27"H	30 - 3000K 35 - 3500K 40 - 4000K 00 - Unlit AA - Warm to Cool 3A - 3000K + Amber 3B - 3500K + Amber 4A - 4000K + Amber	RMT - Remote Power Supply 001 - 0-10V Power Supply ³ 002 - Line Voltage Power Supply ³	A - Dimming B - Anti-Fog AB - Dimming + Anti-Fog

1. Power Supplies are ordered separately
2. Custom mirrors require MOQ and lead time, contact sales for more info
3. Power supplies will come pre-installed on mirrors with an anti-fog mat
4. 270-00228 - Optional 30", 90°, 120V, 3-prong plug

Notes:

1. Lumens based on light source
2. Standard non-stock mirrors subject to 90 day lead time and a 50 piece minimum order quantity
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Warranty: 10-year frame and structure - 7-year glass, power supply and LEDs

