

Enhance™ Classic

Integrated LED Illuminated Mirror




Features

- Copper-free backing for greater scratch and corrosion resistance
- 3x magnification with integrated magnifying mirror
- Two dimmable power supplies available for either 0-10V or line voltage dimming
- Bright, even illumination prevents shadows
- Various size and color options (contact sales for stock)
- Dual-color white or white/amber option upgrades functionality
- Optional anti-fog mat prevents condensation

Product Details

Part #	694MM2436-KKSO00B	690010.121 - 0-10V Dimming 690010.143 - Line Voltage 690010.143-2 - Line Voltage w/ Plug
Dimensions	24"W x 36"H x 1.7"D	13"L x 1.25"W x 1.7"D
Mounting Frame/Housing	Aluminum	Aluminum
Wattage	34W	Output: 96W Max
Voltage	24V DC	Input: 120 - 277V AC
Current	1.5A	Output: Max 4A
Lumens	2800LM	N/A
Color Temp.	3000K	N/A
Power Factor	N/A	0.94 @ 120V AC
Frequency	N/A	50 - 60Hz



Line Voltage Approved Dimmers

Leviton		Lutron	
VPI06-1LZ	DZ6HD	SCL-153PR	CTCL-153PDH
TTI06-1LZ	6674	DVCL-153PR	PD-6WCL
IPL06	6672	DVWCL-153PH	PD-5NE-WH




3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com



REV: 011525

Specification Guide

Sample Part #: 694MM2436-30SO00B-AB

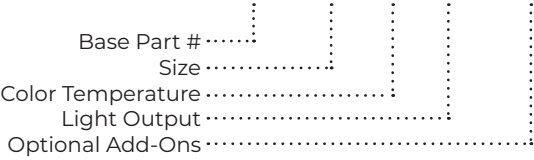

Base Part #	Size	Color Temp.	Light Output	Optional Add-Ons
Standard Stock Mirrors				
694MM	2436 - 24"W x 36"H	30 - 3000K	SO00B - Standard Output	N/A
Custom Mirrors				
694MM	2436 - 24"W x 36"H 3036 - 30"W x 36"H 3636 - 36"W x 36"H 4236 - 42"W x 36"H 4836 - 48"W x 36"H 5436 - 54"W x 36"H 6036 - 60"W x 36"H 7236 - 72"W x 36"H	30 - 3000K 35 - 3500K 40 - 4000K 00 - Unlit AA - Warm to Cool 3A - 3000K + Amber 3B - 3500K + Amber 4A - 4000K + Amber	SO00B - Standard Output UL00B - Unlit SO001 - 0-10V Power Supply ³ SO002 - Line Voltage Power Supply ³	A - Dimming B - Anti-Fog AB - Dimming + Anti-Fog

1. Power Supplies are ordered separately
2. Custom mirrors require MOQ and lead time, contact sales for more info
3. Power supplies will come pre-installed on mirrors with an anti-fog mat
4. 270-00228 - Optional 30°, 90°, 120V, 3-prong plug

- Notes:
1. Lumens based on light source
2. Standard non-stock mirrors subject to 90 day lead time
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Warranty: 10-year frame and structure - 7-year glass, power supply and LEDs

