

Rail Mount Ski Tow

Part#: 84502

INSTALLATION INSTRUCTIONS


PARTS/TOOLS NEEDED:	
	
Ski Tow	Power Drill

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- It is recommended that fuse protection be added to the positive(+) input.

Bracket Mount:

1. Drill two 3/8" holes 3.94" on center
 2. Remove hex nuts from posts
 3. Insert posts into holes drilled in step 1 making sure ski tow tongue is facing up
 4. Attach and tighten hex nuts back on posts
- * This ski tow was designed to be used when welded into a 1" transom rail. It can be welded into any length rail

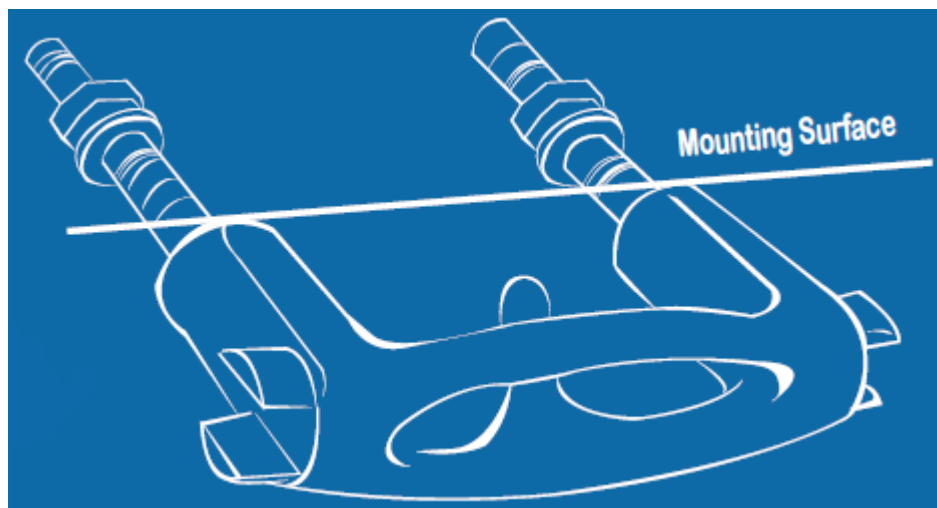

3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
Rev A · 07/20/16