

Atlas™ Diffused Flexible LED Light




Features

- Higher LED count creates superior light output
- Partially diffused silicone reduces glare
- RGB LEDs provide complete color control
- IP66 and UV stable, designed for exterior installation
- Multiple length and channel options available

Product Details

Housing Material	Diffused Silicone
Voltage	10-14V DC
Wattage	2W/Ft
Current	0.2A/Ft
Lumens	100LM/Ft
Color Temp.	RGB
Wire Gauge	22AWG
IP Rating	IP66
UV Stable	Yes

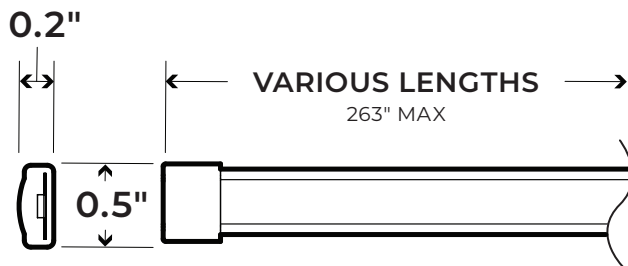

Specification Guide

Sample Part #: RHLL1206-66812-12

Base Part #	
Voltage	
Color Temperature	
Light Length	
Wire Length	
Light Width	

Base Part #	Voltage	Color Temp.	Light Length	Wire Length	Light Width
RHLL	12 - 12V	06 - RGB	668 - 263"	12 - 12"	12 - 12mm

Note: Light cannot be field cut, contact sales for information on custom lengths
Lead time is 90-120 days for new flex light lengths

Mounting Channel	Part #
Aluminum Screw Mount	RBLL12-3S
Aluminum Adhesive Mount	RBLL12-7T
White Plastic Screw Mount	RBLL12-KS
White Plastic Adhesive Mount	RBLL12-KT
Black Plastic Screw Mount	RBLL12-LS-72
Black Plastic Adhesive Mount	RBLL12-LT-72



Aluminum



White Plastic



Black Plastic

