

Luna™ Eclipse Diffused Flex Light




Luna Eclipse w/ Tape

Features

- Gray silicone blends in with darker surfaces for seamless integration
- Diffused material prevents direct view of LEDs
- Standard IP66 rating for damp and wet locations
- Custom length, color, and channel options
- RGB options for ultimate control, allowing multiple color selection
- Available with adhesive tape backing for simple installation


Product Details

| | Single Color | RGB |
|------------------|----------------------------------|---------------------|
| Housing Material | Gray Diffused Silicone | |
| Voltage | 10-14V DC | |
| Wattage | 2.3W/Ft | 4.3W/Ft |
| Current | 0.2A/Ft | 0.3A/Ft |
| Lumens | 60LM/Ft @ 3000K | 20LM/Ft @ RGB White |
| Color Temp. | 3000K, 6300K, Blue, Amber or Red | RGB |
| Wire Gauge | 18AWG | 22AWG |
| IP Rating | IP66 | |
| UV Stable | Yes | |
| Listing | UL | |

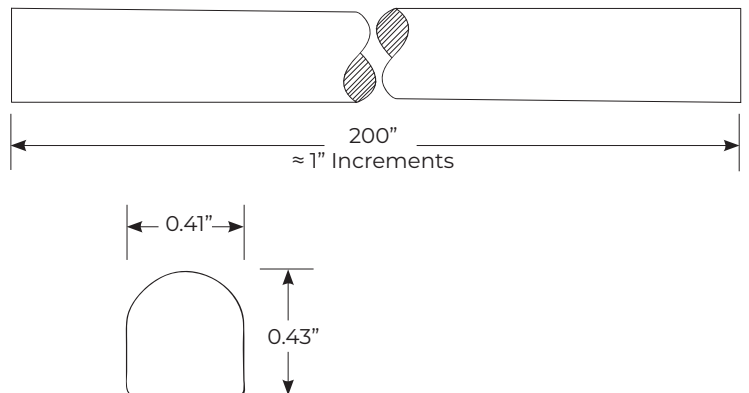

Specification Guide

Sample Part #: RNLL1206-20012-10-DL

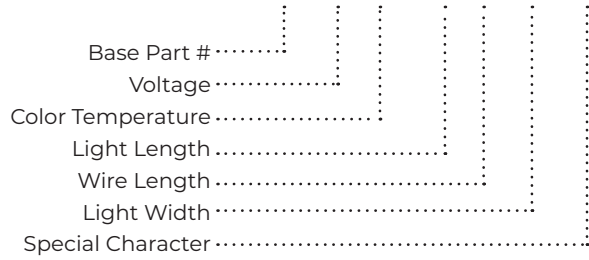

| Base Part # | Voltage | Color Temp. | Light Length | Wire Length | Light Width | Special Character |
|-------------|----------|---|--------------|-------------|-------------|--|
| RNLL | 12 - 12V | 30 - 3000K 63 - 6300K BL - Blue AM - Amber 02 - Amber/White 03 - Blue/White 04 - Red/White 05 - Red/Blue 07 - Red/Amber 06 - RGB | 200 - 200" | 12 - 12" | 10 - 10mm | DL - Gray Silicone 5M - Gray Silicone w/ Tape |

Note: Light cannot be field cut, contact sales for information on custom lengths
 Adhesive back flex light requires a 90-120 lead time for new lengths

Accessory Specification

| Description | Part # |
|------------------------------|--------------|
| Aluminum Screw Mount | RNLL-1-72 |
| Aluminum Adhesive Mount | RNLL-1T-72 |
| Aluminum 45° Screw Mount | RNLL-2-72-CL |
| Aluminum 45° Adhesive Mount | RNLL-2T-72 |
| Black Plastic Screw Mount | RBLL-2 |
| Black Plastic Adhesive Mount | RBLL-1 |
| White Plastic Screw Mount | RBLL10-KS |
| White Plastic Adhesive Mount | RBLL10-KT |



White Plastic



Black Plastic



Aluminum

