


Piper™ 2.0 Front Cap Flex Light



Features


- Co-extruded silicone housing withstands wind and water spray, such as that experienced on the front of a vehicle
- Available in bulk rolls or custom cut lengths
- Available in warm white, cool white, blue, red, green, or amber
- Includes easy to install adhesive backing for quick and durable installation
- Plastic mounting channels available with or without 3M 9495LE adhesive backing
- IP64 rated for water resistant applications

Product Details

Voltage	10-14V DC
Wattage	1.1W/Ft
Current	0.12A/Ft
Lumens	80LM/Ft
Color Temp.	3000K, 3500K, 4000K, 6300K, Blue, Red, Green or Amber
IP Rating	IP64
UV Stable	Yes
Wire Gauge	18 AWG
Listing	UL

Specification Guide

Sample Part #: TPQ1230-70012-8

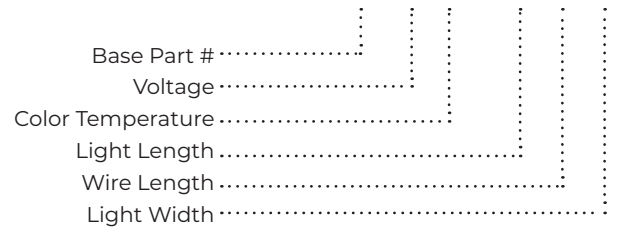

Base Part #	Voltage	Color Temp.	Light Length	Wire Length	Light Width
TPQ	12 - 12V	30 - 3000K 35 - 3500K 40 - 4000K 63 - 6300K BL - Blue RD - Red GR - Green AM - Amber	700 - 700cm	12 - 12"	8 - 8mm

Note: Light cannot be field cut, contact sales for information on custom lengths

TPB-1 : 72" Black Plastic Screw Mount Channel

TPB-2 : 72" Clear Plastic Adhesive Mount Channel

